

# Gas Safety Management Plan (Section C)

**Piling ACF CTC** 

22/04/2025

Produced to align with the requirements of the Gas Safety (Management) Regulations 1996

(Gas Safety Management Plan (Section A) covers the requirements of the Gas Safety (Installation and Use) Regulations 1998

## **ESTABLISHMENT KEY PERSONALITIES (GAS) CONTACTS**

Role	Name	Tel No.	Email
Head of	Neville Holmes MBE	01823 217930 or	wx-ce@rfca.mod.uk
Establishment		07850 655017	
Establishment's	Andy Carr - CSA	01179 863344	wx-bri-csa@rfca.org.uk
SHEF		ext 206	
Establishments	Andy Carr - CSA	01179 863344	Wx-bri-csa@rfca.org.uk
4C's Coordinator		ext 206	
Senior DIO Estate	Mark Cubitt	07955 280440	wx-est-hd@rfca.mod.uk
Representative or			
Equivalent			
Site DIO Estate	Mark Armstrong	07508 129987	wx-est-mgr3@rfca.mod.uk
Representative or			
Equivalent			
MMO Site Manager	Paul Wakeford	07356101565	Paul.wakeford@vivodefence.com
Gas Safety Manager	Justin Westcott	07793222820	Justin.westcott@vivodefence.com
(GSM)			
Gas Responsible	Jason Cuthbert	07592112763	Jason.cuthbert@vivodefence.com
Person (GRP)			

The Content of this Gas Safety Management Plan (GSMP) have been Approved by the Gas Safety Manager:

Signature:	JP Westcott	Date: 22/04/2025
------------	-------------	------------------

## **Authorisation for Implementation**

The content and format of this GSMP has been agreed and authorised for implementation by Defence Infrastructure Organisation Technical Services Principal Gas Engineer (DIO TS PGE) and a unique reference number has been generated to support this.

The Content of this GSMP have been agreed by the Senior DIO Estate Representative or Equivalent and future works following the findings will be supported:

Signature:	M Cubitt	Date: 08/05/2025

The content of this GSMP have been agreed by the Head of Establishment and future works following the findings will be supported

Signature:	N Holmes	Date:	08/05/2025

#### **Reviews and Amendments**

GSMPs are 'living documents' that should be subject to continual review and updating as required. Although the level of attention required will vary considerably depending on the size and complexity of each site, GSMPs should be reviewed at least once per quarter by the GRP. Although it is likely that changes are not required at each review, the date of review and any changes made should be indicated on the tables below. The review of the GSMP will include a site visit to ensure that the site and the content of the GSMP remain valid. The reviews and amendments made will be deleted during the DIO TS three yearly review when the GSMP is re-authorised by the PGE.

Date	Page	Amendment
22/12/2021	No.	Initial Davalanment
		Initial Development
06/05/2022	3	Updated Gas Emergency Helpdesk Details
06/05/2022	20	Updated Gas Emergency Number
05/08/2022	13 & Annex B	Added Gas Network & Gas Line Drawings & Details
11/11/2022	Annex C	Reviewed R/A's & Renewed Date
13/02/2023	15, 23- 25	Added Network Analysis Details
12/06/2023	N/A	No Amendments Required
18/08/2023	N/A	No Amendments Required
29/11/2023	Annex C	Updated R/A's Review Date and Added Current Preventative Measures
29/02/2024	1 & ii	Updated HoE Details
29/02/2024	9, 18-27	Added ECV comment, sections 6 – 21 updated,
15/05/2024	N/A	No Amendments Required
12/08/2024	N/A	No Amendments Required
17/10/2024		GSM re-authorisation (previously authorised 13/02/2023)
14/11/2024	ii & 2	Added New Head of Estates Details & Updated Estate manager Details, Reviewed R/A's & Renewed Date
18/02/2025	1.4	Updated document to reflect change to VIVO as MMO including named RP and GSM

Date	Reviewed by	Authorised by	Comments
22/12/2021	M Fenwick	N King	Initial Review
06/05/2022	M Fenwick	M Fenwick	Quarterly Review
05/08/2022	M Fenwick	M Fenwick	Quarterly Review
11/11/2022	M Fenwick	M Fenwick	Quarterly Review
13/02/2023	M Fenwick	N King	Annual Review
12/06/2023	M Fenwick	M Fenwick	Quarterly Review
18/08/2023	M Fenwick	M Fenwick	Quarterly Review
29/11/2023	M Fenwick	M Fenwick	Quarterly Review
29/02/2024	M Fenwick		Annual Review
15/05/2024	M Fenwick	M Fenwick	Quarterly Review
12/08/2024	M Fenwick	M Fenwick	Quarterly Review
17/10/2024	Neville King	Neville King	GSM re-authorisation
14/11/2024	M Fenwick	M Fenwick	Quarterly Review
28/01/2025	M Fenwick	M Fenwick	DNV De-Mobilisation Review /
			Handover
18/02/2025	J Cuthbert	J Westcott	Update and quarterly review
22/04/2025	J Westcott	J Westcott	Initial review/approval – Noting network PPM will be undertaken and then this will be reviewed to potentially remove Part C providing adequate maintenance is in place.

#### FORWARD

MOD, as a natural gas conveyor within Great Britain, has submitted an Exemplar Gas Safety Case (MOD GSC) to demonstrate compliance with the Gas Safety (Management) Regulations 1996 (GSMR). Maintenance Management Organisations (MMO's) are engaged who have the overall contractual responsibility to operate and maintain the gas network assets under their Contract, including the management of the safe flow of gas within the system and the provision of an emergency service. The MOD delegate specific duties to the MMO but accountability for gas safety on each site rests with the Head of Establishment.

Whilst Liquified Petroleum Gas (LPG) networks fall outside of the scope of (GSMR) the MOD deems that the principles detailed within the MOD GSC will equally apply to LPG systems. Requirements for the adequate management of LPG distribution systems is described in,

- a. Health and Safety at Work Act 1974
- b. Management of Health and Safety at Work Regulations 1999
- c. Pipelines Safety Regulations 1996
- d. Gas Safe (Installation & Use) Regulation 1998
- d. Liquid Gas UK Codes of Practice

The MOD GSC considers all parts of the MOD estates gas supply system that forms part of the gas supply network. This includes all parts of the MOD estates network from the LPG vessel to the emergency control valve (ECV) of individual consumers. The MOD GSC considers primarily those matters that relate to the management of the safe flow of gas within the system and the provision of an emergency service.

The conclusions of the assessments within the MOD GSC are:

- There is an adequate safety management system in place to manage the flow of gas safely in its gas supply system.
- Adequate arrangements are in place to comply with the requirements of a. to d. above and allow co-operation with other bodies that have duties under the regulations.
- Adequate arrangements are in place for ensuring that gas conveyed within the system meets the standards for composition and pressure.
- Adequate arrangements are in place for dealing with reports of gas escapes and investigation of incidents.
- Adequate arrangements have been made to ensure that the risk of a supply failure is minimised.
- Adequate arrangements have been made to ensure that supply emergencies are managed safely.

Following initial approval by the DIO PGE, the GSM is required to reapprove this GSMP annually. GSMP must be submitted to DIO TS every three years for PGE authorisation.

GSMP Section A documents detail MOD measures to ensure compliance with the Gas Safety (Installation and Use) Regulations 1998 (GS(IU)R) for installation pipework (downstream of Emergency Control Valves).

GSMP Section B documents contain site specific details and arrangements as a direct annex to the MOD GSC in line with the Gas Safety (Management) Regulations 1996 (GSMR).

The MOD apply the same requirements to the management of LPG distribution systems on its overseas estate in accordance with the currently published Secretary of State's Health and Safety policy statement.

Although the term 'gas networks' is normally taken to refer to natural gas distribution systems, as defined in GSMR, 'network' is used throughout this document to refer to LPG distribution systems pipework between the first stage regulator and the ECV.

## Contents

ES	STABLISHMENT KEY PERSONALITIES (GAS) CONTACTS	
FC	ORWARD	v
1	THE DUTY HOLDER AND ESTABLISHMENT LEVEL KEY PERSONALITIES	1
_	1.1. GAS SAFETY CASE DUTY HOLDER	
	1.2. DIO TECHNICAL SERVICES PRINCIPAL GAS ENGINEER (PGE)	
	1.3. ESTABLISHMENT PERSONALITIES	
	1.4. MAINTENANCE MANAGEMENT ORGANISATION (MMO)	
	1.5. ADDITIONAL GAS CONTACTS.	
2		
	2.1 SITE OVERVIEW	
	2.2 DOCUMENT CENTRE.	
	2.3 PURPOSE OF PIPELINE(s).	-
	2.4 CONSUMERS.	
	2.5 DESCRIPTION OF MOD LPG NETWORKS	
	2.6 LPG COMPOUND DETAILS.	
	2.7 LPG VESSEL DETAILS.	
	2.8 FIRST STAGE PRESSURE REGULATING INSTALLATIONS (PRIS)	7
	2.9 SECONDARY PRESSURE REGULATING INSTALLATIONS (PRIS)	7
	2.10 THIRD STAGE PRESSURE REGULATING INSTALLATIONS (PRIS)	8
	2.11 EMERGENCY CONTROL VALVES (ECVs)	9
	2.12 MOD LPG NETWORK PIPELINE DETAILS	
	2.13 LPG NETWORK INTERCONNECTION	11
	2.14 SENSITIVE AND CRITICAL LOADS.	
	2.14 STANDBY ALTERNATIVE FUEL SUPPLIES.	12
3	PLANT AND PREMISES	13
	3.1 DRAWINGS	
	3.2 Additional Drawings.	
	3.3 RESPONSIBILITY INTERFACES AND ACCESS ARRANGEMENTS	-
4.	. OPERATION AND MAINTENANCE DOCUMENTATION	
	4.1 MOD NETWORK MAINTENANCE	
	4.2 IRON PIPEWORK.	
	4.3 BURIED STEEL PIPEWORK.	
5.	. RISK ASSESSMENTS	17
	5.1 MODEL RISK ASSESSMENTS.	17
	5.2 ADDITIONAL SITE-SPECIFIC RISK ASSESSMENTS	17
6.	. SAFETY MANAGEMENT SYSTEMS	18
7.	. EMPLOYEE COMPETENCE	18
8.		
	. HEALTH AND SAFETY COMMUNICATION – INTERNAL	
	9.1 HEALTH AND SAFETY COMMUNICATION	
	0. HEALTH AND SAFETY COMMUNICATION – EXTERNAL	
11	1. AUDITS	
	11.1 GSM AUDIT	19
12	2. CO-OPERATION	21

### **VIVO Business**

1	12.1	EMERGENCY EXERCISES	21
13.	E٨	MERGENCY SERVICE RESPONSE TO GAS ESCAPES	21
14.		INVESTIGATIONS	21
15.		GAS QUALITY	22
16.		CONTINUITY OF SUPPLY	22
17.	ΑĽ	DEQUATE NETWORK PRESSURE	23
1	17.1	NETWORK ANALYSIS	23
1	17.2	DESIGN MINIMUM PRESSURE.	23
1	17.3	NETWORK ANALYSIS RESULTS	23
		NETWORK VALIDATION SURVEY	
		NETWORK VALIDATION SURVEY RESULTS.	
1	17.6	CORRECTIVE MEASURES.	26
18.		GAS SUPPLY EMERGENCIES	26
19.		GAS QUALITY – SOLE CONVEYER	26
20.		DISCONTINUING GAS SUPPLY	27
21.		RESTORATION OF SUPPLIES	27
AN	NEX	A - ABBREVIATIONS	28
AN	NEX	B - SITE LAYOUT DRAWINGS	1
AN	NEX	C - MODEL RISK ASSESSMENTS	3
AN	NEX	D - ADDITIONAL SITE-SPECIFIC RISK ASSESSMENT TEMPLATE	18

#### 1 THE DUTY HOLDER AND ESTABLISHMENT LEVEL KEY PERSONALITIES

## 1.1. Gas Safety Case Duty Holder.

The duty holder for the MOD Gas Safety Case is the Permanent Under Secretary for Defence (PUS). However, day to day responsibility for the preparation and maintenance of the document is delegated to the DIO TS Head of Engineering and Construction, who also has the responsibility for managing the system in accordance with the Safety Case. PUS delegates maintenance responsibility to the Top-Level Budget Holders (TLB's), to manage safety of the gas network. The TLB's utilise MOD Contracts i.e. MMOs who have responsibility for maintaining the gas network on behalf of the MOD.

Name: Permanent Under Secretary

Address: Main Building

Horse Guards Parade

Whitehall London SW1A 2HB

## 1.2. DIO Technical Services Principal Gas Engineer (PGE).

The PGE assumes the role of Senior Authorising Authority which is a term used within the MOD to recognise the authority of the person responsible for overseeing the appointment of, and auditing Authorising Engineers (AEs). For Gas the AEs are replaced by Gas Safety Managers (GSMs).

Name: Jeremy Obbard

Address: DIO HQ

2:

Whittington Barracks

Lichfield WS14 9TJ 07748 903260

☑: Jeremy.obbard100@mod.gov.uk

1.3. Establishment Personalities.			
Name of Establishment:	Pilning ACF CTC		
Establishment Address:	Pilning ACF CTC New Passage Road Pilning South Gloucestershire BS35 4LZ		
Head of Establishment (HoE)  (This is the most senior MOD person identified, by the chain of command, as responsible for the establishment. The HoE holds accountability for ensuring site compliance with the requirements of GSMR and the MOD GSC, including this GSMP.)	Name: Position: Organisation: Address:	Chief Executive Wessex Reserve Forces' and Cadets' Association Mount House Mount Street Taunton Somerset TA1 3QE  01823 217930 or 07850 655017	

Establishment 4C's	Name: Position: Organisation: Address:	Andy Carr CSA Wessex Reserve Forces' & Cadets' Association Keynsham Army Reserve Centre Ashmead Road Bristol BS31 1SX 01179 863344 ext 206 Wx-bri-csa@rfca.org.uk
Establishment SHEF	Name: Position: Organisation: Address: ■:	Andy Carr CSA Wessex Reserve Forces' & Cadets' Association Keynsham Army Reserve Centre Ashmead Road Bristol BS31 1SX 01179 863344 ext 206 Wx-bri-csa@rfca.org.uk
Senior DIO representative or equivalent  (This may be the SEFM, but will vary depending on the contract this establishment falls under)	Name: Position: Organisation: Address: ■:	Mark Cubitt Head of Estates Wessex Reserve Forces' & Cadets' Association Mount House Mount Street Taunton Somerset TA1 3QE 07955 280440 wx-est-hd@rfca.mod.uk
Site Guardroom (24 Hours)	<b>₽</b> :	No Guardroom on site – Working Hours Contact: Andy Carr 01179 863344 ext 206  There is no out of hours contact. On weekend use the site will call the MMO helpdesk.
Site emergency services (Are they 24 Hours?)	Police 2:  Medical 2:	999 999

1.4. Maintenance Management Organisation (MMO).			
The MMO for this es	tahlishment is:	VIVO Defence Services	
MMO Customer Services	Organisation:  Address:	VIVO Helpdesk Helpdesk	
MMO Helpdesk – Gas Emergencies only (24 Hours)  Note: Please do not contact the general public National Gas Emergency Service for suspected gas escapes on RFCA infrastructure	Organisation: Address:	•	
MMO Site Manager	Name: Organisation: Address:	Wessex Reserve Forces' & Cadets' Association	
Gas Safety Manager (GSM)	Name: Organisation: Address:	Bldg. 003, CTCRM Lympstone Nr Exmouth Devon EX8 5AR 07725 038039 Justin.westcott@vivodefence.com	
Gas Responsible Person (GRP)	Name: Organisation: Address:	Jason Cuthbert	

1.5. Additional Gas Contacts.				
LPG Supplier	Organisation: Address:	Athena House Athena Drive Tach brook Drive Warwick CV34 6RL 03457 444 999 (emergencies)		
DIO SD EUS (Service, Delivery, Energy, Utility and Sustainability)	⊠:	DIORDUtil-DelFuels@mod.gov.uk		
National Emergency	Fire 🖀:	999		
Services (24 Hours)	Police 🖀:	999		
	Medical 🖀:	999		

#### 2 OPERATION UNDERTAKEN

#### 2.1 Site Overview.

A brief description of the establishment and its current use. This should include how many separate sites are present, number of buildings being supplied by LPG, what the LPG is used for and number of personnel who will be affected by an LPG outage. Any critical loads should be initially highlighted here (quick reaction forces, large medical facilities, temp controlled ammunition stores etc)

Pilning ACF and CTC is a single site establishment with 6 buildings on site, two of which are supplied by LPG. These buildings are supplied with LPG from the Low Pressure (LP) MoD Network.

There is no Natural Gas on site and there are two 2000 litre bulk LPG vessels located within a compound on site.

The Weekend Training Centre can be occupied by different Cadet detachments and the Pilning Detachment of the ACF are based on site.

The ablutions block which is supplied from the MoD network is used for hot water and supplies toilet and shower facilities. The accommodation building supplied from the MoD network is used for heating and hot water and supplies the accommodation area, kitchen and offices.

The MoD PE network was laid in 2018.

#### **GSM** note 17/10/2024:

In accordance with DIO Technical Standard TS GAS-01 'Inspection, Maintenance and Testing of MOD Gas Network Plant, Equipment and LPG Compounds', Pilning ACF / CTC may be considered exempt from the production of a GSMP C.

However, owing to the existence of a buried LPG network, supplying two buildings, the network "must be subjected to the same standard as Network Pipework".

For this reason, a GSMP C has been produced, to give clearer line of sight to the standards that should be applied to the maintenance of the buried network.

#### 2.2 Document Centre.

Location of the establishment Gas Document Centre containing all information relating to the LPG systems at this establishment (Ref: MOD GSC 10.2) and contact details if different to the GRP.

The Gas document centre is held electronically by Vivo Defence Services on the sharepoint system.

### 2.3 Purpose of Pipeline(s).

A brief description of demarcation agreements between the LPG supplier and the MOD. Number of MOD networks including operating pressures. End users of gas being supplied such as accommodation, workshops, catering facilities etc.

Pilning ACF and CTC has one LPG bulk storage compound on site which houses 2 in number 2000 litre LPG bulk vessels. The LPG bulk tanks are owned and maintained by Calor Gas.

The Bulk vessels supply the MoD Network with Low Pressure (LP) LPG nominally at 75 mbar. The LPG leaves the bulk vessels in vapour phase and runs through the 1<sup>st</sup> stage regulator reducing pressure to 2 bar. The gas continues through the 2<sup>nd</sup> stage regulator further reducing the pressure to feed the MoD network at 75 mbar.

The demarcation point between the Calor gas responsibility and the MoD network is the outlet of the 1<sup>st</sup> stage regulator.

The MoD network serves 2 buildings.

#### 2.4 Consumers.

Consumers can be broadly categorised as domestic or industrial / commercial. Gas supplies to domestic consumers are normally prioritised above industrial / commercial consumers.

Domestic consumers supplied from the MOD	0
network:	
Industrial / commercial consumers supplied	2
from the MOD network:	

#### 2.5 Description of MOD LPG Networks.

A description of the MOD LPG network(s) including location of the compound(s), first stage regulator, second stage regulator. Pipeline length, material, diameter, pressure, age and condition.

Pilning ACF and CTC has one LPG bulk storage compound on site which houses 2 in number 2000 litre LPG bulk vessels. The LPG bulk vessels are owned and maintained by Calor Gas.

The LPG bulk vessel compound is a rectangular area surrounded by a 1.8m steel fence with two exits on opposite sides. There are two 9kg fire extinguishers located in the compound and two 9kg fire extinguishers outside of the compound.

There is an appropriate signed area for the tanker deliveries and there are emergency signs located on two sides of the compound.

The Bulk vessels supply the MoD Network with Low Pressure (LP) LPG gas at 75mbar. The LPG gas leaves the bulk vessels in vapour phase and runs through the 1st stage regulator reducing pressure to 2 bar. The gas continues through the 2nd stage regulator further reducing the pressure to feed the MoD network at 75.35 mbar.

The MoD network serves 2 buildings.

The LPG compound was built and the MoD PE network laid in 2018. The MoD network is laid in 32mm PE and both buildings have an SIV.

## MoD Network Pipework Length – 41.8 metres

## 2.6 LPG Compound Details.

The following table contains the details of the bulk LPG vessel compounds located at this establishment. This includes the compounds that

may not go on to supply and MOD network.

may not go on	to supply and iv	IOD HOLWOIK.						
Compound Name	Is a suitable 1.8m	Is there 2 gates	Has a suitable	If required is	Is there a suitably	Is emergency		If required is
/ ID	security fence in place	for access / egress	FRA been completed	suitable FFE in place	designated & marked vehicle delivery location	lighting required for compound / delivery area, and if so is correct lighting in place & maintained	Has a suitable DSEAR RA, including HAC drawing, been produced	earthing present and been subject to periodic testing and inspection
Compound 001	Yes	Yes	Yes	Not Required	Yes	No	No	Not Earthed

## 2.7 LPG Vessel Details.

The following table contains the details of the bulk LPG vessel(s) located at this establishment.

Vessel Name / ID	Location	Capacity (Kgs)	Date of Last Major Inspection
Bulk Tank 001	Compound 001	2200	December 2018
Bulk Tank 002	Compound 001	2250	November 2017

Total LPG capacity at this establishment (Kgs): 4000 litres / 2000Kgs

## 2.8 First Stage Pressure Regulating Installations (PRIs).

The following table summarises the basic arrangement of the first stage PRIs. These are typically installed within the vessel compound and are the responsibility of the LPG supplier. The demarcation for MOD responsibility is typically the outlet of this PRI.

Number of first stage PRIs: 1

			Inlet pipe	line (responsib	ility of the LPG	Supplier)	Outle	t pipeline (res	onsibility of the	MOD)
PRI Name / ID	Gas Supplier	Nominal Reg	P tier – HP, IP,	Pressure	Pipework	Diameter	P tier – HP,	Pressure	Pipework	Diameter
		Size	MP, LP	(mbar)	Material	(mm)	IP, MP, LP	(mbar)	Material	(mm)
Novacomet APS2000	Calor Gas	3/4"	HP	Not Known	Steel	20	MP	75	Steel	3/4"

# 2.9 Secondary Pressure Regulating Installations (PRIs).

The following table summarises the basic arrangement of the secondary PRIs.

Number of secondary PRI installations:

Inlet pipeline (responsibility of the LPG Supplier)

Outlet pipeline (responsibility of the MOD)

PRI Name / ID	Nominal Reg Size	P tier – HP, IP, MP, LP	Pressure (mbar)	Pipework Material	Diameter (mm)	P tier – HP, IP, MP, LP	Pressure (mbar)	Pipework Material	Diameter (mm)
Novacomet BP 2403	3/"	MP	75	Steel	20	MP	75	Steel	25
2.10 Third Stage Pressure Reg	gulating Insta	llations (PRI	s).						
The following table summarises the	ne basic arrang	gement of the	third stage	PRIs.					
Number of third stage PRI installation	ns: 2								
		Inlet pipe	line (responsib	ility of the LPG	Supplier)	Outle	t pipeline (resp	onsibility of the	MOD)
PRI Name / ID	Nominal Reg Size	P tier – HP, IP, MP, LP	Pressure (mbar)	Pipework Material	Diameter (mm)	P tier – HP, IP, MP, LP	Pressure (mbar)	Pipework Material	Diameter (mm)
Novacomet BP 2403 – Ablutions Block	3/,"	MP	75	Steel	25	LP	37.07	Steel	25
Novacomet BP 2403 – Accommodation Block	3/,"	MP	75	Steel	25	LP	38.04	Steel	25

# 2.11 Emergency Control Valves (ECVs).

The ECV(s) are included in the scope of the network and are therefore the responsibility of the MOD. The following table summarises the basic arrangements of the ECV(s).

The MOD LPG network(s) terminates at:	2 EC\	/'s							
Building Name / Number	Incoming Gas Pressure	Appliance / Process / Domestic	ECV No. / Code	Indoors / Outdoors	Key required to access the ECV – Where from?	ECV Location	Handle Fitted	ECV correctly labelled	Nominal Valve Size
Ablutions Block	37.07	Hot Water	WX64/ECV/001	Outdoors	No	At Plant Room Entry	Yes	Not currently funded by RFCA	20mm
Accommodation Block	38.04	Heating and Hot Water	WX64/ECV/002	Outdoors	No	At Plant Room Entry	Yes	Not currently funded by RFCA	20mm

# 2.12 MOD LPG Network Pipeline Details.

The table below shows the total pipeline lengths for the different pipe diameters and operating pressures.

operating pressures.					
	Pressure	Pipe	Pipe	Number of	Total
Network Name / ID	(mbar)	Material	Diameter	Sections	Length
			(mm)		(m)
Network 001	75	PE	32	3	41.8
		Total ler	gth of all MO	D networks:	41.8

### 2.13 LPG Network Interconnection.

The outlet pipework system from each of the primary meter installations can be isolated networks or may be interconnected with other MOD systems. For isolated systems turning off the gas supply at an LPG vessel installation will shut off supply to all buildings / processes on that pipe system. Interconnected systems will require two or more LPG vessel installations to be turned off. Figures 2.1 and 2.2 below show the differences.

The MOD pipework system on this e	Isolated	
Supply from Primary Meter	Pressure	Can the interconnection be
(Name / ID)	(mbar)	isolated?
None		

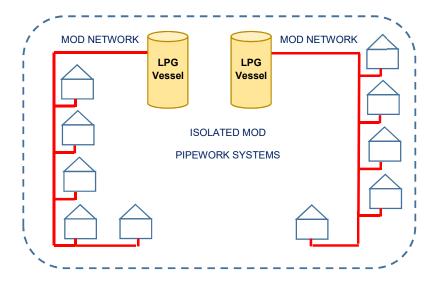


Figure 2.1 – Isolated MOD pipework systems

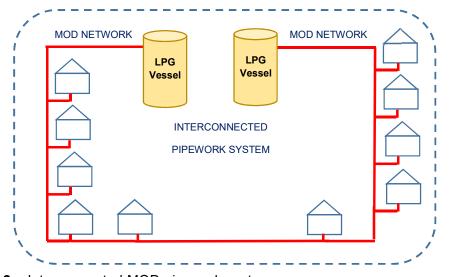


Figure 2.2 – Interconnected MOD pipework systems

#### 2.14 Sensitive and Critical Loads.

The MOD does not have any 'interruptible consumers'. Historically large industrial / commercial consumers, who had an alternative fuel supply, could opt to pay a lower rate for an interruptible contract which enabled the supplier to isolate their supply at short notice in order to preserve the gas supply to the public and 'firm contract' industrial consumers in the event of a supply shortage.

However, all industrial and commercial supplies are, effectively, 'interruptible' isolation of these will usually be requested by the supplier in times of supply emergencies in order to preserve domestic supplies for as long as possible.

Where Industrial / commercial consumers have particularly sensitive or critical consumers these can be taken into consideration by the gas supplier when requesting isolation. Sensitive consumers could include supplies such as a school, medical facility, temperature-controlled ammunition stores etc.

The number of sensitive loads at this	establishment is:	0		
Facility / Consumers	Supplied from primary meter		Approx. max	
_	name	name / ID		
2.14 Standby Alternative fuel Su	ipplies.			
Where operational critical supplies a should be considered which would e local or national supply emergency.				
Facility / Consumers	Supplied from primary meter name / ID	Approx. max throughput (m³ hr)	Alternative fuel supply	
None		·		

#### 3 PLANT AND PREMISES

## 3.1 Drawings.

The gas layout drawings provide an overview of the LPG compounds and network(s).

The layout drawings should detail:

- a) The site boundaries.
- b) Vessel installations.
- c) First stage PRI location.
- d) Secondary PRI locations.
- e) Third stage PRI locations
- f) Valve locations.
- g) Pipeline routes, diameters, material and depth.
- h) Operating pressure tier.
- i) Demarcations.
- j) Responsibilities (Gas supplier / MOD)

The layout drawings are located at Annex B either embed as a PDF or hard copies. The drawings will be subject to the GRP quarterly review and following any physical changes or system updates. Hard copies of the drawings are located in the gas document centre.

Gas Layout Drawing Number	Revision	Scale	Detail
	Date		
WX64-B-A1	28/07/2022	1:100	General Site Layout Showing Gas
			Service
			Pilning ACF CTC Route
			PDF
			WX64-B-A1.pdf

## 3.2 Additional Drawings.

In addition to layout drawings the below additional drawings are available from the gas documents centre and GRP.

Additional Drawing Number	Revision	Scale	Detail
	Date		
WX64-A-A3	05/01/2022	NTS	Accommodation Block Gas Line
			Drawing
WX64-A-A3	05/01/2022	NTS	Ablutions Block Gas Line Drawing
			WX64-A-A3.pdf

## 3.3 Responsibility Interfaces and Access Arrangements.

For gas incidents or maintenance that affect the gas supplier, the gas supplier representative will become the emergency controller. The gas supplier establishment direct contact will be the GRP who will make all relevant arrangements for access to the LPG vessel compound and plant room access.

As the MOD establishments are high security, all gas supplier personnel who attend for gas supply emergencies or to carry out maintenance work will be granted access to site on an individual basis.

All gas supplier personnel attending this establishment will be subject to site specific security procedures and will be required to be escorted whilst on site, access and escorting may vary depending on the nature of the visit, time of incident etc.

Below are the site-specific arrangements in place to allow the gas supplier access during an emergency, as agreed by the HOE:

No Guardroom on site – Working Hours Contact: Andy Carr 01179 863344 ext 206

There is no out of hours contact. On weekends call the MMO helpdesk.

## 4. OPERATION AND MAINTENANCE DOCUMENTATION

## 4.1 MOD Network Maintenance.

Network maintenance is mandated in GSMR and all network maintenance requirements and tasks on MOD establishments are detailed in the MOD Gas Network Technical Standard TS/GAS-01. TS/GAS-01 has been written in line with legislation, industry standards and guidelines.

The testing, inspecting and maintenance frequencies vary depending on the task, the table below shows the intervals at which it should be conducted and the date the tasks have been complete.

complete.			
TS/GAS-	Maximum	Brief Description of Task	Task was
01	Interval		completed
Job No.	Period		on
1	General		
1.1	5 Years	Network Analysis – to model the adequacy of	08/08/2022
		network design	
1.2	5 Years	Network Validation Survey – to check network	25/11/2021
		analysis model with measured data	
2	Iron Pipe	lines, mains, fittings and services (includes be	uried outlet
	pipework	and risers from Primary Meter Installations and PRIs	s.)
	Note: iron	pipes including risers that transition below ground are i	not permitted
		ith LPG – any such pipes must be immediately se	
		nt with immediate mitigation measures implemented as a	
	PGE		.g
3		lines, mains and services (includes buried outlet pi	pework and
		n Primary Meter Installations and PRIs.)	
		<b>,</b> ,	
	Note: burie	ed steel pipes including risers that transition below gro	ound are not
		or use with LPG – any such pipes must be immediately s	
		nt, and the PGE informed	
4		ene (PE) Pipelines, mains and services	
4.1	5 Years	Leakage survey – All pipes within site regardless of	25/11/2021
4.1	5 Years	Leakage survey – All pipes within site regardless of proximity to buildings	25/11/2021
4.1	5 Years 5 Years	proximity to buildings	25/11/2021 25/11/2021
		proximity to buildings Over line pipe survey – All pipes within site	
4.2	5 Years	proximity to buildings  Over line pipe survey – All pipes within site regardless of proximity to buildings	25/11/2021
	5 Years  Above-gro	proximity to buildings  Over line pipe survey – All pipes within site regardless of proximity to buildings bund pipework (including outlets from first stage LP)	25/11/2021 <b>G regulator</b> ,
4.2 <b>5</b>	5 Years  Above-gro PRI pipew	proximity to buildings  Over line pipe survey – All pipes within site regardless of proximity to buildings bund pipework (including outlets from first stage LP ork, exposed crossings or water courses, services or services	25/11/2021  G regulator, entries etc.).
4.2	5 Years  Above-gro	proximity to buildings  Over line pipe survey – All pipes within site regardless of proximity to buildings bund pipework (including outlets from first stage LP ork, exposed crossings or water courses, services of Visual inspection of pipework	25/11/2021 <b>G regulator</b> ,
4.2 <b>5</b> 5.1	5 Years  Above-group PRI pipew 12 Month	proximity to buildings Over line pipe survey – All pipes within site regardless of proximity to buildings ound pipework (including outlets from first stage LP ork, exposed crossings or water courses, services of Visual inspection of pipework Visual inspection of Emergency Control Valves	25/11/2021  G regulator, entries etc.). 25/11/2021
4.2 <b>5</b> 5.1 5.2	5 Years  Above-group PRI pipew 12 Month 12 Month	proximity to buildings  Over line pipe survey – All pipes within site regardless of proximity to buildings  ound pipework (including outlets from first stage LP ork, exposed crossings or water courses, services of Visual inspection of pipework  Visual inspection of Emergency Control Valves (ECVs)	25/11/2021 <b>G regulator,</b> entries etc.). 25/11/2021 25/11/2021
4.2 <b>5</b> 5.1	5 Years  Above-group PRI pipew 12 Month	proximity to buildings  Over line pipe survey – All pipes within site regardless of proximity to buildings  ound pipework (including outlets from first stage LP ork, exposed crossings or water courses, services of Visual inspection of pipework  Visual inspection of Emergency Control Valves (ECVs)  Visual inspection of pipe supports, brackets, gantries	25/11/2021  G regulator, entries etc.). 25/11/2021
5.1 5.2 5.3	5 Years  Above-group PRI pipew 12 Month 12 Month 12 Month	proximity to buildings  Over line pipe survey – All pipes within site regardless of proximity to buildings  ound pipework (including outlets from first stage LP ork, exposed crossings or water courses, services of Visual inspection of pipework  Visual inspection of Emergency Control Valves (ECVs)  Visual inspection of pipe supports, brackets, gantries etc.	25/11/2021 <b>G regulator,</b> entries etc.). 25/11/2021 25/11/2021
4.2 <b>5</b> 5.1 5.2	5 Years  Above-group PRI pipew 12 Month 12 Month	proximity to buildings Over line pipe survey – All pipes within site regardless of proximity to buildings ound pipework (including outlets from first stage LP ork, exposed crossings or water courses, services of Visual inspection of pipework Visual inspection of Emergency Control Valves (ECVs) Visual inspection of pipe supports, brackets, gantries etc. Visual inspection and assessment for vehicle impact	25/11/2021 <b>G regulator,</b> entries etc.). 25/11/2021 25/11/2021
5.1 5.2 5.3 5.4	5 Years  Above-group PRI pipew 12 Month 12 Month 12 Month 12 Month	proximity to buildings  Over line pipe survey – All pipes within site regardless of proximity to buildings  ound pipework (including outlets from first stage LP ork, exposed crossings or water courses, services of Visual inspection of pipework  Visual inspection of Emergency Control Valves (ECVs)  Visual inspection of pipe supports, brackets, gantries etc.  Visual inspection and assessment for vehicle impact protection measures – e.g building service entries.	25/11/2021 <b>G regulator,</b> entries etc.). 25/11/2021 25/11/2021 25/11/2021
5.1 5.2 5.3	5 Years  Above-group PRI pipew 12 Month 12 Month 12 Month 12 Month	proximity to buildings Over line pipe survey – All pipes within site regardless of proximity to buildings ound pipework (including outlets from first stage LP ork, exposed crossings or water courses, services of Visual inspection of pipework Visual inspection of Emergency Control Valves (ECVs) Visual inspection of pipe supports, brackets, gantries etc. Visual inspection and assessment for vehicle impact	25/11/2021 <b>G regulator,</b> entries etc.). 25/11/2021 25/11/2021 25/11/2021
5.1 5.2 5.3 5.4	5 Years  Above-group PRI pipew 12 Month 12 Month 12 Month 12 Month 12 Month	proximity to buildings  Over line pipe survey – All pipes within site regardless of proximity to buildings  ound pipework (including outlets from first stage LP ork, exposed crossings or water courses, services of Visual inspection of pipework  Visual inspection of Emergency Control Valves (ECVs)  Visual inspection of pipe supports, brackets, gantries etc.  Visual inspection and assessment for vehicle impact protection measures – e.g building service entries.  y / Third Stage Pressure Regulating Installations (PF)	25/11/2021  G regulator, entries etc.). 25/11/2021 25/11/2021 25/11/2021 25/11/2021
5.1 5.2 5.3 5.4	5 Years  Above-group PRI pipew 12 Month 12 Month 12 Month 12 Month 12 Month Note: this i	proximity to buildings  Over line pipe survey – All pipes within site regardless of proximity to buildings  ound pipework (including outlets from first stage LP ork, exposed crossings or water courses, services of Visual inspection of pipework  Visual inspection of Emergency Control Valves (ECVs)  Visual inspection of pipe supports, brackets, gantries etc.  Visual inspection and assessment for vehicle impact protection measures – e.g building service entries.  y / Third Stage Pressure Regulating Installations (PF of the secondary or third stage network PRIs only – it does	25/11/2021  G regulator, entries etc.). 25/11/2021 25/11/2021 25/11/2021 25/11/2021 RIs).
5.1 5.2 5.3 5.4	5 Years  Above-group PRI pipew 12 Month 12 Month 12 Month 12 Month 12 Month Note: this in the PRIs a	proximity to buildings  Over line pipe survey – All pipes within site regardless of proximity to buildings  ound pipework (including outlets from first stage LP ork, exposed crossings or water courses, services of Visual inspection of pipework  Visual inspection of Emergency Control Valves (ECVs)  Visual inspection of pipe supports, brackets, gantries etc.  Visual inspection and assessment for vehicle impact protection measures – e.g building service entries.  y / Third Stage Pressure Regulating Installations (PF of secondary or third stage network PRIs only – it does sociated with the first-stage LPG regulators or the Util	25/11/2021  G regulator, entries etc.). 25/11/2021 25/11/2021 25/11/2021 25/11/2021 RIs).
4.2 5 5.1 5.2 5.3 5.4 6	5 Years  Above-group RI pipew 12 Month 12 Month 12 Month 12 Month 15 Month 16 Month 17 Month 18 Month 19 Month 19 Month 10 Month 10 Month 10 Month 11 Month 11 Month 12 Month 12 Month 12 Month 12 Month 13 Month 14 Month 15 Month 16 Month 17 Month 18 Month 18 Month 19 Month 19 Month 19 Month 10 Month 10 Month 10 Month 11 Month 12 Month 12 Month 12 Month 13 Month 14 Month 15 Month 16 Month 17 Month 18 Month 18 Month 19 Month 19 Month 10 Month	proximity to buildings Over line pipe survey – All pipes within site regardless of proximity to buildings ound pipework (including outlets from first stage LP ork, exposed crossings or water courses, services of Visual inspection of pipework Visual inspection of Emergency Control Valves (ECVs) Visual inspection of pipe supports, brackets, gantries etc. Visual inspection and assessment for vehicle impact protection measures – e.g building service entries.  y / Third Stage Pressure Regulating Installations (PF is for secondary or third stage network PRIs only – it does sociated with the first-stage LPG regulators or the Util ) installed downstream of the consumers / user ECVs.	25/11/2021  G regulator, entries etc.). 25/11/2021 25/11/2021 25/11/2021 25/11/2021 RIs).
5.1 5.2 5.3 5.4	5 Years  Above-group PRI pipew 12 Month 12 Month 12 Month 12 Month 12 Month Note: this in the PRIs a	proximity to buildings  Over line pipe survey – All pipes within site regardless of proximity to buildings  ound pipework (including outlets from first stage LP ork, exposed crossings or water courses, services of Visual inspection of pipework  Visual inspection of Emergency Control Valves (ECVs)  Visual inspection of pipe supports, brackets, gantries etc.  Visual inspection and assessment for vehicle impact protection measures – e.g building service entries.  y / Third Stage Pressure Regulating Installations (PF of secondary or third stage network PRIs only – it does sociated with the first-stage LPG regulators or the Util	25/11/2021  G regulator, entries etc.). 25/11/2021 25/11/2021 25/11/2021 25/11/2021 RIs).

6.2	12 Month	Visual inspection of pipework within PRI housing		
7	Meter and PRI Housings			
	Scope for t	his activity includes the housing of all meter and PRI ins	stallations	
7.1	12 Month	Inspection of PRI housing (where present)	N/A	
8	Valves			
8.1	12 Month	Inspection of valve chambers	25/11/2021	
8.2	12 Month	Leakage detection survey within valve chamber	25/11/2021	
9	LPG Vessel Installation Compound			
9.1	12 Month	General Inspection to include items a) to k) in	25/11/2021	
		TS/GAS-01.		
8.2	12 Month	Visual inspection of above ground steel outlet	25/11/2021	
		pipework.		

## 4.2 Iron Pipework.

Where cast iron (including spun iron) or ductile iron pipework exists on an MOD establishment it is to be risk assessed in accordance with section 4.3 of the MOD GSC and, where required, entered into a mains replacement programme in order to comply with the UK mains replacement enforcement policy.

Below is the amount of Cast Iron and / or Ductile Iron pipe, and details, identified at this establishment from a survey:

Cast Iron (m):		0					
Ductile Iron (m):		0					
Pressure (mbar)	Nominal Diameter (")	r Ductile Iron Length Proximity to Score Repla		Planned Replacement Date			

## 4.3 Buried Steel Pipework.

Where buried steel pipework exists on a MOD establishment there is a legal requirement to take steps to ensure its rapid replacement.

Below is the amount of buried steel pipework on the LPG installation at this establishment:

Buried Steel Pipework (m): 0						
Steel Pipework	Steel pipework	Nominal	Total	Pressure	Planned	
connected to vessel	connected to	Dia (")	Length	(mbar)	Replacement	
number	building number		(m)	, ,	Date	
	_					

#### 5. RISK ASSESSMENTS

#### 5.1 Model Risk Assessments.

The Model Risk Assessment (RA) shown in the table below, highlight the factors that will affect the safe management of the flow of gas, and the provision of the emergency response service. These RA, reviewed and modified as appropriate to this establishment, are shown at Annex C. (These RA must be reviewed and authorised by the GRP as being correct for this establishment with the date entered at the top of the RA).

RA No.	Title (Model Risk Assessments)
1	Any gas leak considered hazardous to persons or property (Under med/low pressure conditions).
2	Fire or explosion near to, or directly involving, a pipeline or gas facility.
3	A failure of operation of pipeline/plant onsite, or immediately downstream of site, that is maintained by the gas transporter.
4	A failure of operation of pipeline/plant onsite that is maintained by site services.
5	Failure of safety critical equipment.
6	Under-pressure in the gas system.
7	Over-pressure in the gas system.
8	Failure in system during load shedding.
9	General changes to the gas network.
10	Failure of PPM, general operation of the gas network plant/equipment and safety inspections.
11	Emergency Shutdowns.
12	Interface with Gas Supplier.
13	Interface with the consumers.
14	Interface with Emergency Services.
15	Natural Disasters, civil disturbances, other unforeseen events.

## 5.2 Additional Site-Specific Risk Assessments.

In addition to the model RA shown above, the site-specific RAs shown below have been identified. These RA are shown in Annex D (As with the Model RAs above, these must be reviewed and authorised by the GRP as being correct for this establishment with the date entered at the top of the RA).

16	
17	
18	
19	

#### 6. SAFETY MANAGEMENT SYSTEMS

No site-specific considerations (refer to MOD Gas Safety Case Section 6) unless stated below:

Network maintenance was last undertaken by DNV on 25/11/2021. Provision of future network maintenance has not been procured by WXRFCA at this time.

### 7. EMPLOYEE COMPETENCE

No site-specific considerations (refer to MOD Gas Safety Case Section 7) unless stated below:

No site-specific considerations confirmed

#### 8. CONTRACTORS

No site-specific considerations (refer to MOD Gas Safety Case Section 8) unless stated below:

No site-specific considerations confirmed

#### 9. HEALTH AND SAFETY COMMUNICATION - INTERNAL

## 9.1 Health and Safety Communication

This section describes the systems in place to enable effective communications within this establishment. Different forms of communication are used to pass information to people within the MOD/MMOs depending on the type of information and the audience including in the event of an emergency.

## 9.1.1 Public Address System.

The public address arrangements for this establishment are shown below

There is no public address system on site

## 9.1.2 Internal Electronic Correspondence.

Details of any internal email or intranet correspondence are shown below

The site has the facility for email to be used for communication. Email addresses for Key site personalities are listed in section 1 of this document.

#### 9.1.3 Direct Contact.

Details of any site-specific arrangements for direct MOD / MMO contact with site personnel and families are shown below

Face to face meetings with key personnel are possible on a regular basis if required.

## 9.1.4 Emergency Plans.

Details of any site-wide emergency plans and arrangements, including MMO documents are shown below

No specific gas emergency plan for the establishment is in place. MOD Exemplar Gas Safety Case to be used as guidance.

## 9.1.5 On-Site Emergency Services.

Details of site-specific arrangements for communication with site emergency services, such as fire, are shown below

There are no on-site emergency services. Site personnel will dial 999 for Police, Fire and Emergency Medical services.

For Gas Emergencies call the VIVO helpdesk:

0800 030 9320

#### 10. HEALTH AND SAFETY COMMUNICATION - EXTERNAL

No site-specific considerations (refer to MOD Gas Safety Case Section 10) unless stated below:

No site-specific considerations confirmed

#### 11. AUDITS

#### 11.1 GSM Audit.

The audit process in place monitors and measures compliance with legislation and company policy and is aimed at ensuring the safe flow of gas within the MOD networks and downstream of the consumers ECV.

The GSM audit role is primarily concerned with assuring that the GRP duties are being effectively undertaken and that the gas risks are being effectively managed on the site. All GSM Audits will be carried out using the standard audit template prepared by the DIO PGE. Every site with gas networks shall be audited as frequently as practicable, ideally annually and in accordance with a programme agreed with the DIO PGE. Every site shall be audited at least once every three years. Each GSM shall implement an audit programme which must be agreed by the DIO PGE. All completed audit reports shall be sent to the DIO PGE for review and filing.

As agreed with the PGE, GSM audits on	On a maximum three-yearly basis
this establishment will be carried out:	• •
The last GSM audit was conducted on:	17/10/2024
The last GSM audit was carried out by:	Neville King

The qualitive assessment of the GSM audit concluded this establishment is: (safe to continue / safe to continue subject to caveats / unsafe to continue)	Safe to continue subject to Caveats
Audit findings:	See audit report
Points addressed following last audit:	

#### 12. CO-OPERATION

## 12.1 Emergency Exercises.

On MOD networks, the MMO utilises the gas supplier to provide a gas emergency response service for dealing with reported gas escapes. However, the gas supplier response would normally be to isolate at the vessel(s). As this is likely to cause considerable inconvenience and expense to MOD facilities, where possible MMO staff / contractors would attempt to attend the emergency in advance of the gas supplier personnel to assess the emergency and advise gas supplier accordingly.

It is the responsibility of the HoE to ensure that a gas emergency exercise is conducted on the establishment at least once in a three-year period. The HoE will require the support and involvement of the MMO and all key stakeholders such as the gas supplier. Lessons learnt should be actioned and kept within the gas document centre.

Date of last emergency exercise:	23/04/2024
Date of next planned emergency exercise:	TBC
Date of last actual emergency involving	23/04/2024
the gas supplier:	
Was the gas supplier involved in the last	Yes
emergency exercise:	
Were the MOD emergency services	No
involved in the last emergency exercise or	
actual emergency:	
Summary of lessons learnt from the last	Gas leak was reported by contractors working
emergency exercise or actual emergency:	on site, all procedures correctly followed
	, ,
Date MMO emergency contact numbers	
and procedures were last tested:	23/04/2024
•	20,0 1/2021

#### 13. EMERGENCY SERVICE RESPONSE TO GAS ESCAPES

No site-specific considerations (refer to MOD Gas Safety Case Section 13) unless stated below:

No site-specific considerations confirmed

### 14. INVESTIGATIONS

No site-specific considerations (refer to MOD Gas Safety Case Section 14) unless stated below:

No site-specific considerations confirmed

## 15. GAS QUALITY

No site-specific considerations (refer to MOD Gas Safety Case Section 15) unless stated below:

No site-specific considerations confirmed

## 16. CONTINUITY OF SUPPLY

No site-specific considerations (refer to MOD Gas Safety Case Section 16) unless stated below:

No site-specific considerations confirmed

#### 17. ADEQUATE NETWORK PRESSURE

### 17.1 Network Analysis.

Network Analysis is the primary tool by which the MOD satisfies itself that anticipated levels of demand can be supplied from its LPG networks to gas consumers. It allows different scenarios to be examined. The technique ensures the efficient management and operation of the LPG supply systems. It enables a detailed understanding of the gas supply system to be developed upon which cost effective planning and operating decisions can be made.

In accordance with industry recommendations Network Analyses must be repeated at every site containing an MOD Network at least five-yearly, or sooner, if for gas system modification purposes or when demand profiles have changed, or are expected to change.

For this establishment the network analy	ysis was undertaker	າ by:	08/08/2022
For this establishment the network analy	ysis was undertaker	n on:	DNV

#### 17.2 Design Minimum Pressure.

These minimum pressures will be seen at the extremities of the systems under extreme conditions. To ensure that all gas equipment downstream of the LPG vessel can be safely operated, it is a gas industry recommendation that the network should maintain a minimum of 90% of the nominal set outlet pressure of the first stage regulator at the inlet to each final stage regulator.

The minimum modelled pressure (based on 1:20 peak 6 minutes flow conditions) at the system extremity is:	37 mbar
The location of the minimum pressure is:	Accommodation Block
The declared minimum pressure (DmP) is:	42.9mbar

#### 17.3 Network Analysis Results.

A brief description of the network analysis results is below;

## Pipe Data

The pipe model was built from the 'WX64-B-A1.dwg' and 'WX64-B-A1.pdf' files produced by DNV from drawing records supplied by the RFCA. The files included the pipe lengths, connectivity, diameters and materials all used in the modelling.

### **Demand Data**

The demand levels used in the analysis are the maximum estimated flows that the network is likely to experience. This criterion is stated in IGE/GL/1 Planning of Gas Distribution Systems of MOP not Exceeding 16 bar, section 4.2.1: Applying the principles of IGE/GL/1 is considered good practice but as this an LPG site the requirements of COP 25 should also be taken into consideration.

'Any system should be designed to meet the maximum demands placed upon it. Note: Experience has shown that this is likely to be the maximum demand that will occur in any period of not less than 6 minutes, expressed as an hourly rate.'

The Pilning CTC site is comprised of a mixture of building types and usage, and the principal uses for gas are for space/water heating, and catering. The effects of diversity have not been considered. This undiversified demand modelling ensures that the worst-case scenario is assessed.

#### **Supply Data**

Gas is supplied to Pilning CTC from two 2 tonne LPG vessels. Supply pressure data obtained by DNV in the form of instantaneous pressure readings shows the outlet pressure of the vessels to be as follows:

2 x 2 tonne LPG vessels, located in the Bulk Compound had an outlet pressure of 45.6 mbar.

### **Vessel Sizing**

Each LPG vessel has an offtake capacity, which is the maximum rate at which the liquid LPG vaporises to produce gas. The larger the tank the greater the offtake capacity, which is normally quoted in Kilowatts (kW).

A lower ambient temperature will reduce the maximum continuous offtake rate of an LPG vessel, so consideration must be given of the vessel's operating environment when specifying the size of LPG vessel required.

The offtake capacity of the vessel installed must be sufficient to supply all of the appliances connected to it at peak demand.

The buildings at Pilning CTC are supplied gas via a fixed LPG storage compound of the following capacity.

Buildings Supplied - Accommodation and Ablutions building LPG Storage Capacity - 2x 2000L (propane capacity) Above Ground LPG Vessels Design Offtake Capacity - 374kW (2x 187KW)

## **LPG Storage Offtake Capacities**

The design offtake capacity of a single 2000L storage vessel is based on a tank with 25% liquid contents and at a temperature of 5°C, for two vessels this capacity is increased to 374kW.

At present the total maximum gas demand (226.5 kW at peak load) for all supplies is within this value

The pipe data available at the time of producing this report, and which has been used to build the Synergi network analysis model of Pilning CTC, was of a good quality. Demands were estimated based upon appliance ratings determined during the site survey.

The LPG vessel offtake capacity is higher than the calculated maximum demand and are therefore adequately sized.

There is a good degree of confidence in the pressures predicted by the network model based on the comparison with recorded pressures.

### 17.4 Network Validation Survey.

As part of the network analysis validation procedure, pressure monitoring points are to be installed on MOD networks to enable pressure surveys to be conducted. In accordance with the recommendations of Section 8.3.2. of IGE/GL/1, pressure surveys will need to be carried out on MOD networks to verify that the results from the network models were indicative of the recorded pressures on the network. This is a practice which is widely used throughout the gas industry to check network models provide realistic results.

It is the responsibility of the MMO to ensure adequate pressure surveys are conducted at regular intervals to validate the pressures predicted by network analysis results. This must be conducted at a minimum of once every five years, in conjunction with a Network Analysis or when demand profiles on the network have changed. Similarly, if the results of a previous Network Analysis are suspected to be inaccurate (for example, low extremity pressures being experienced), a repeat Network Analysis should be undertaken.

For this establishment the latest validation	08/08/2022
survey was undertaken by:	
For this establishment the latest validation	DNV
survey was undertaken on:	

## 17.5 Network Validation Survey Results.

A brief description of the network validation survey results is below which includes a comparison of the modelled pressure and actual pressure record;

## Pressure Survey

In accordance with the recommendations of Section 8.3.2 of IGE/GL/1, a pressure survey would normally be carried out on the Pilning CTC network in order to verify that the results from the network model were indicative of the recorded pressures on the network. This is a practice which is widely used throughout the gas industry to provide confidence in network analysis models.

The network was surveyed on the 25th November 2021. Single point pressure readings using a Druck pressure gauge or similar were recorded. These were attached to the outlet of the supply regulators and at the meter points in the buildings.

A simple pressure survey of short-term single readings was undertaken at 1 meter / appliance location in the modelled area. The recorded pressures taken in this type of survey may be standing pressures where the appliances are not operational, or working pressures, where they are. There may be several mbar difference between these pressures.

#### **Pressure Modelling and Comparison**

The network model was built and analysed as detailed above.

It is often the case that the modelled pressures will fall below those recorded as the modelled demand is the estimated maximum and it is unlikely that these conditions were experienced whilst the survey was undertaken. Providing that the modelled pressures are not significantly lower than those recorded, this should not be a cause for concern as the difference can be attributed to the lower demand flows being experienced.

Duilding	Modelled	Pressure (mbarg)		
Building	Flow (sm³/h)	Single Read	Modelled	
Bulk Compound: 2 x 2 tonne tanks	8.58	45.6 (standing)	45.6	
Ablutions Block: Washroom	4.70		44.01	

**Accommodation Block: Accommodation** 

3.88

42.91

All of the modelled pressures are similar to the recorded pressures as expected. Whilst no comparison data was available to confirm modelled network pressures, there is still a reasonable level of confidence in the modelling of the network since this a simple network with well-defined pipe and demand data.

It should be noted,

No test points were installed on supplies to the following buildings:

**Ablutions Block** 

Accommodation Block

It was therefore not possible to validate the findings of the network analysis modelling. Defects have been raised for the installation of appropriate test points to facilitate future operation and maintenance testing requirements.

#### 17.6 Corrective measures.

Following the network analysis and network validation survey the below corrective or mitigation measures have been planned at this establishment;

MOD LPG network name / ID:

MoD Network 01

The results for the Pilning ACF CTC model as a whole are satisfactory.

Follow-on works will be undertaken to update and revalidate the network analysis once funded

### 18. GAS SUPPLY EMERGENCIES

No site-specific considerations (refer to MOD Gas Safety Case Section 18) unless stated below:

No site-specific considerations confirmed

#### 19. GAS QUALITY - SOLE CONVEYER

No site-specific considerations (refer to MOD Gas Safety Case Section 19) unless stated below:

No site-specific considerations confirmed

## 20. DISCONTINUING GAS SUPPLY

No site-specific considerations (refer to MOD Gas Safety Case Section 20) unless stated below:

No site-specific considerations confirmed

## 21. RESTORATION OF SUPPLIES

No site-specific considerations (refer to MOD Gas Safety Case Section 21) unless stated below:

No site-specific considerations confirmed

#### ANNEX A

### **ANNEX A - ABBREVIATIONS**

4C's Co-ordination, Co-operation, Communication and Control

AE Authorising Engineer

CI Cast Iron

CIPS Close Interval Potential Survey

CP Cathodic Protection

DI Ductile Iron

DIO SD EUS Defence Infrastructure Organisation Service Delivery, Energy, Utility and

Sustainability

DIO TS Defence Infrastructure Organisation Technical Services

DIO Defence Infrastructure Organisation

DmP Design Minimum Pressure ECV Emergency Control Valve

FIM Functional Independence Measure

GRP Gas Responsible Person

GSIUR Gas Safety (Installation and Use) Regulations1998

GSMR Gas Safety (Management) Regulations 1996

GSC Gas Safety Case GSM Gas Safety Manager

GSMP Gas Safety Management Plan

HoE Head of Establishment

HP High Pressure

IGEM Institute of Gas Engineers and Managers

IP Intermediate Pressure

LP Low Pressure

LPG Liquified Petroleum Gas

MMO Maintenance Management Organisation

MOD Ministry of Defence
MP Medium Pressure
NA Network Analysis
NG Natural Gas

NVS Network Validation Survey

PE Polyethylene

PGE Principal Gas Engineer

PRI Pressure Reduction Installation
PUS Permanent Under Secretary

RA Risk Assessment


SHEF Safety, Health, Environment and Fire

TLB Top Level Budget Holder

## **ANNEX B**


# **ANNEX B - SITE LAYOUT DRAWINGS.**

# **Pilning LPG Gas Network**

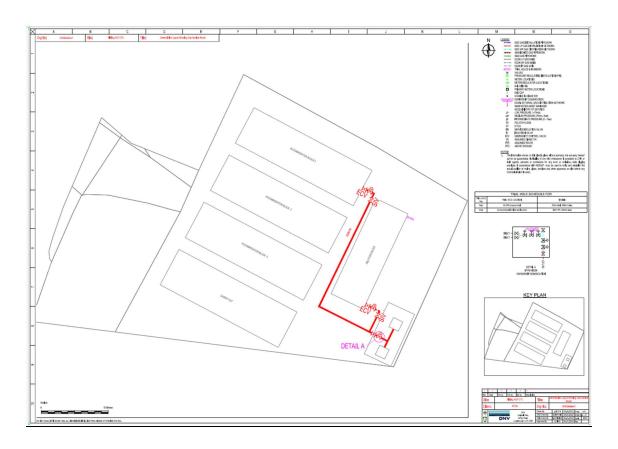


## Gas Line Drawings

## **Accommodation Block**

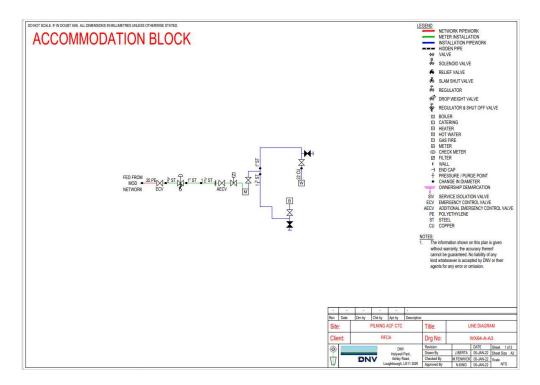

#### **Ablutions Block**

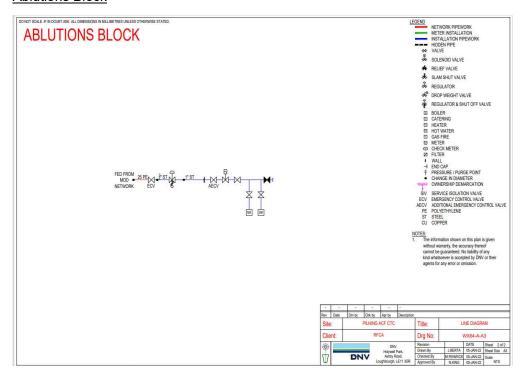

#### **ANNEX C**

# **ANNEX C - MODEL RISK ASSESSMENTS**

Site Reviewed Model Risk Assessment - 01		
For: Pilning ACF and CTC  Accepted by: Jason Cuthbert		
		Date reviewed: 18/02/2025
Risk	Any leak at any pressure can be quantified as a hazard. The higher the pressure and/or depending on the location of the leak the risk to the surrounding area varies Depending on the severity of the leak, other hazards such as explosions, fires, supply failures, pollution and associated financial implications could arise Depending on how quickly & thoroughly the gas leak is dealt with the resulting hazards from the incident will vary.	
Caused By	Damage to pipelines from digging Failure of control equipment Damage caused by general construction Corrosion of pipelines Failure of mechanical joints and seals Deterioration or rupture of pipeline Poor communication between involved parties can exacerbate the problem Length of response time by first responders	
Hazards Resulting from Risk	Damage to pipelines caused by uncontrolled escaping gas Risk of causing a supply emergency Damage to persons & property Risk of Explosions & Fire Pollution of environment Purging maybe required after corrective action	
Current Preventative Methods	Permits to Dig Planned Preventative Maintenance Type & Quality control of materials used in gas network Strict adherence to emergency procedures in the event of a Isolation via emergency stops Installation of gas network to industry standards	n emergency
Further Required Preventative Methods	Pressure monitoring  More accurate gas network layout drawings  Use of the gas safety management plan  Training of all involved parties  Training and simulated gas emergency drills	
Audits	In the event of an incident, near miss or any other hazardou must be reviewed and updated as appropriate.	is occurrence this RA

Site Reviewed Model Risk Assessment - 02			
For: Pilning A	CF and CTC	Accepted by: Jason Cuthbert	
Fire or explo	sion near to, or directly involving, a pipeline or gas facility	Date reviewed: 18/02/2025	
Risk	Any fire or explosion directly involving a gas pipeline or f major incident.  Any fire or explosion near to a gas pipeline or facility ma and or damage to property.	,	
Caused By	Undetected trapped gas Unresolved gas leaks Failure of control equipment, pipelines, seals, joints etc. Damage to gas pipelines through digging and/or general construction Incorrect initial procedure when dealing with a gas leak Inadequate action by first responder		
Hazards Resulting from Risk	Fire and/or explosions causing death and/or injury to general populous  Damage and/or destruction of surrounding properties  Damage to gas pipelines, gas control centres & other gas related equipment  Disruption of gas supply  Secondary Explosions & Fire resulting from inaction		
Current Preventative Methods	Scheduled Maintenance  Designed for purpose  Permits to Dig  Strict adherence to emergency procedures, including ve area	ntilating and evacuating	
Further Required Preventative Methods	Pressure monitoring Use of the gas safety management plan Training and simulated gas emergency drills		
Audits	In the event of an incident, near miss or any other hazar must be reviewed and updated as appropriate.	dous occurrence this RA	

Site Reviewed Model Risk Assessment 3		
For: Pilning A	CF and CTC	Accepted by: Jason Cuthbert
A failure of o	peration of pipeline/plant onsitethat is maintained by the Gas Supplier	Date reviewed: 18/02/2025
Risk	Any incident directly involving the bulk LPG vessel(s) and equipment onsite can only be dealt with by Calor Gas. In response time by Calor Gas, has an impact on the sever The level of cooperation and communication between Gas onsite parties has an impact on the eventual severity of the	the event of a leak the ity of the incident as Supplier and the
Caused By	Poor response time by Calor Gas.  Poor communication between onsite parties and Calor Gas.  Poor coordination of onsite parties and Calor Gas.  Poor communication of procedures  Lack of supply resulting in drop in supply pressure, resulting in site wide gas supply failure  Bulk LPG vessel(s) running out of LPG	
Hazards Resulting from Risk	Disruption of gas supply to whole site  Re-commissioning & purging after corrective action  Re-ignition of non automatic ignition systems  Long down time due to above hazards	
Current Preventative Methods	Contact and Communication between site and DNV.  Use of DNV emergency number to allow communication Calor Gas.	between DNV and
Further Required Preventative Methods	Communication of site procedures to Calor Gas.  Understanding Calor Gas. procedures  Training and simulated gas emergency drills  Training for quicker response time  Pressure monitoring  Planning for load shedding (reduces the risk of site wide  Fitting automatic ignition systems as standard  Use of the gas safety management plan	,
Audits	In the event of an incident, near miss or any other hazard must be reviewed and updated as appropriate.	dous occurrence this RA

Site Reviewed Model Risk Assessment 4		
For: Pilning A	CF and CTC	Accepted by: Jason Cuthbert
A failure of o	A failure of operation of pipeline/plant onsite that is maintained by site services	
Risk	Any incident directly involving the low or medium pressure be dealt with by the onsite gas operatives. In the event of time by the onsite operatives has an impact on the seven. The level of cooperation and communication between or emergency services and gas operatives has an impact of the incident.	of a leak the response rity of the incident nsite parties such as
Caused By	Poor response time by site services Poor communication between onsite parties Poor coordination of onsite parties Poor communication of procedures	
Hazards Resulting from Risk	Disruption of gas supply to whole site  Re-commissioning & purging after corrective action  Re-ignition of non-automatic ignition systems  Long down time due to above hazards	
Current Preventative Methods	Scheduled Maintenance Designed for purpose Permits to Dig Permits with emergency procedures	
Further Required Preventative Methods	Pressure monitoring Use of the gas safety management plan Training and simulated gas emergency drills Training for quicker response time Planning for load shedding (reduces the risk of site wide gas failure) Fitting automatic ignition systems as standard	
Audits	In the event of an incident, near miss or any other hazard must be reviewed and updated as appropriate.	dous occurrence this RA

Site Reviewed Model Risk Assessment 5		
For: Pilning ACF and CTC		Accepted by: Jason Cuthbert
	Failure of safety critical equipment	
Risk	Failure of safety critical equipment can have a severe imgas network.	pact on the safety of the
Caused By	Lack of/or poor maintenance Incorrect use of equipment Ageing equipment	
Hazards Resulting from Risk	Lack of control over gas network, resulting in a gas incident Lack of control over gas network during a gas incident	ent
Current Preventative Methods	Scheduled Maintenance Designed for purpose Regular operational training Gas Safety Management Plans	
Further Required Preventative Methods	Pressure monitoring Further training of gas operatives Replacing old equipment where required	
Audits	In the event of an incident, near miss or any other hazard must be reviewed and updated as appropriate.	dous occurrence this RA

Site Reviewed Model Risk Assessment 6		
For: Pilning A	CF and CTC	Accepted by: Jason Cuthbert
11 . 1		Date reviewed: 18/02/2025
Risk	If at any point the pressure in a gas network drops below safety regulators will stop the flow of gas. These regulate appliances and in some instances will also be downstreat individual houses. There is also a regulator on the main. If the pressure in a gas network, leading into a house or certain level a gas safety regulator will terminate the flow the pilot lights to be extinguished. On this site, due to the and houses, it may take up to 3 days to re-ignite all the second control of the same points.	ors are fitted to gas am of the gas meter into intake to the site. facility, drops below a of gas. This will cause multitude of buildings
Caused By	Gas leaks Poor gas network management Failure of Compressors Inadequate supply of gas in the system Failure of pressure control system Bulk LPG vessel(s) running out of LPG	
Hazards Resulting from Risk	Loss of gas supply Gas safety regulators being tripped (requires manually remodels) Long recovery period Potential for air in the gas network	esetting on older
Current Preventative Methods	Scheduled Maintenance Designed for purpose	
Further Required Preventative Methods	Pressure monitoring Regular training of gas operatives Replacing old equipment where required Fitting automatic ignition systems as standard Replacing manual gas safety regulators with automatic of	
Audits	In the event of an incident, near miss or any other hazard must be reviewed and updated as appropriate.	dous occurrence this RA

Site Reviewed Model Risk Assessment 7		
For: Pilning A	CF and CTC	Accepted by: Jason Cuthbert
	Over-pressure in the gas system	Date reviewed: 18/02/2025
Risk	If at any point the pressure in a gas network climbs above safety regulators will stop the flow of gas. These regulated appliances and in some instances will also be downstread individual houses. There is also a regulator on the main of the pressure in a gas network, leading into a house or for certain level a gas safety regulator will terminate the flow the pilot lights to be extinguished. On this site, due to the and houses, it may take up to 3 days to re-ignite all the second safety regulator.	ors are fitted to gas am of the gas meter into intake to the site facility, climbs above a v of gas. This will cause a multitude of buildings
Caused By	Failure of pressure control system Incorrect pipe/valve sizing Blockages in system Poor gas network management Gas quality / composition changes Thermal gain	
Hazards Resulting from Risk	Rupture of gas pipes due to high pressure related  Damage to valves and other control equipment  Damage to seals and joints  Loss of gas supply	
Current Preventative Methods	Scheduled Maintenance Designed for purpose	
Further Required Preventative Methods	Pressure monitoring Regular training of gas operatives Use of the gas safety management plan	
Audits	In the event of an incident, near miss or any other hazar must be reviewed and updated as appropriate.	dous occurrence this RA

Site Reviewed Model Risk Assessment 8		
For: Pilning A	CF and CTC	Accepted by: Jason Cuthbert
	Failure in system during load shedding	Date reviewed: 18/02/2025
Risk	In the event of a gas supply emergency, load shedding of the pressure in the system. However, if a section is isola on that branch use their gas supply the pressure in that I acceptable levels and the pressure safety regulators will	ted and the consumers oranch will drop below
Caused By	Insufficient communication between onsite parties and the Insufficient means of monitoring pressure	ne end user
Hazards Resulting from Risk	Loss of gas supply Gas safety regulators being tripped (requires manually remodels) Long recovery period Potential for air in the gas network	esetting on older
Current Preventative Methods	RAMS	
Further Required Preventative Methods	Better communication Pressure monitoring Use of the gas safety management plan Fitting automatic ignition systems as standard Replacing manual gas safety regulators with automatic of	
Audits	In the event of an incident, near miss or any other hazard must be reviewed and updated as appropriate.	dous occurrence this RA

Site Reviewed Model Risk Assessment 9		
For: Pilning A	CF and CTC	Accepted by: Jason Cuthbert
	General changes to the gas network	Date reviewed: 18/02/2025
Risk	If during the design phase the sizing of the system is under/oversized, it could result in under/over pressure scenarios.  If during the installation of a gas network, the work is not carried out to the relevant British Standards and if the work is not undertaken by operatives trained and skilled to the same British Standards, failure may take place.	
Caused By	Incorrect pipe sizing at design phase Underestimating impact on overall site gas supply Incorrect installation of plant and pipelines Under qualified gas operatives used for gas works	
Hazards Resulting from Risk	Damage to pipelines and gas network plant and equipment Risk of causing a supply emergency Damage to persons & property Risk of Explosions & Fire	ent
Current Preventative Methods	Using trained individuals to carry out work to the gas net Checking credentials of design authority for gas network Use of Permitry	
Further Required Preventative Methods	Monitoring competence of gas network operatives Use of the Gas Safety Management Plan Further checking/commissioning of completed works	
Audits	In the event of an incident, near miss or any other hazar must be reviewed and updated as appropriate.	dous occurrence this RA

Site Reviewed Model Risk Assessment 10		
For: Pilning A	CF and CTC	Accepted by: Jason Cuthbert
ranule unough Frim, general operation of the gas network		Date reviewed: 18/02/2025
	Inadequate action during maintenance can cause failure	in the system
5	If safety inspections are not carried out regularly, the systomatic failure	•
Risk	The day to day operation of the system is vital to the over gas network. If the day to day operation is not undertake the gas network could be vulnerable to failure	
	Gas plant & pipelines are not sufficiently maintained	
	Scheduled activities do not take place.	
	Operatives are insufficiently trained	
Caused By	Inadequate co-ordination of operation	
OddSca By	Inadequate communication between onsite parties	
	Inadequate planning of scheduled activities	
	Inadequate inspection and testing of equipment	
	Demons to pinalines and was naturally plant and agricum	ant
Hazards	Damage to pipelines and gas network plant and equipment Risk of causing a supply emergency	ent
Resulting	Damage to persons & property	
from Risk	Risk of Explosions & Fire	
	That of Explosions & Fire	
	Monitored and maintained	
Current	Using trained individuals to carry out work to the gas net	work
Preventative	Following PPM schedules to carry out works	
Methods	Awareness Training, drills and exercise	
	Using qualified operatives	
	Monitoring competence of gas network operatives	
	Checking credentials of design authority for gas network	redesign
Further	Employ better lines of communication between parties	
Required	Compliance with the Gas Safety Management Plan	
Preventative	, , , , , , , , , , , , , , , , , , , ,	
Methods		
Audits	In the event of an incident, near miss or any other hazar	dous occurrence this RA
,	must be reviewed and updated as appropriate.	

Site Reviewed Model Risk Assessment 11		
For: Pilning A	or: Pilning ACF and CTC  Accepted by: Jason Cuthbert	
	Emergency Shutdowns	Date reviewed: 18/02/2025
Risk	Emergency shutdowns can be used in the event of a gas warrants the gas network or part thereof to be shut down can have a severe impact on the resolution of the incide	n. If this process fails, it
Caused By	Failure of emergency shutdown valves Ageing emergency shutdown valves Lack of sufficient facilities for segregated shutdowns	
Hazards Resulting from Risk	Escalating hazard cause by existing emergency  Damage to pipelines and gas network plant and equipment Risk of causing a supply emergency  Long down time	ent
Current Preventative Methods	Use of the Gas Safety Management Plan Use of site records	
Further Required Preventative Methods	Providing strategically placed emergency shutoff valves Scheduled PPM Checking credentials of design authority for gas network Replacing old equipment where required	redesign
Audits	In the event of an incident, near miss or any other hazar must be reviewed and updated as appropriate.	dous occurrence this RA

Site Reviewed Model Risk Assessment 12		
For: Pilning ACF and CTC		Accepted by: Jason Cuthbert
Interface with Gas Supplier Date reviewed 18/02/2025		Date reviewed: 18/02/2025
Risk	If interfaces between the site team and the gas supplier are the fallout from gas incidents can become more pronounced	
Caused By	Poor response time by the gas supplier  Poor communication between onsite parties and the gas su  Poor coordination of onsite parties and the gas supplier  Poor communication of procedures	pplier
Hazards Resulting from Risk	Damage to pipelines Resultant hazards from any gas incident can escalate Risk of causing a supply emergency Damage to persons & property Risk of Explosions & Fire	
Current Preventative Methods	Contact details in gas safety management plans	
Further Required Preventative Methods	Communication of site procedures to the gas supplier Understanding the gas suppliers' procedures Training and simulated gas emergency drills Regular communication through fixed procedures	
Audits	In the event of an incident, near miss or any other hazardou must be reviewed and updated as appropriate.	is occurrence this RA

Site Reviewed Model Risk Assessment 13				
For: Pilning ACF and CTC		Accepted by: Jason Cuthbert		
Interface with Consumer		Date reviewed: 18/02/2025		
Risk	If communication between the site team and the end user are not carefully established, the fallout from gas shortages could result in the system having to be purged and the pilot lights re-ignited. On a large site such as this, it could take up to three days to re-ignite all pilot lights.			
Caused By	Poor communication  Lack of understanding  No method of checking on gas usage			
Hazards Resulting from Risk	Risk of causing a supply emergency Loss of pressure in system Long recovery period Potential for air in the gas network			
Current Preventative Methods	Regular contact with key personnel			
Further Required Preventative Methods	Pressure monitoring system Use of the Gas Safety Management Plan			
Audits	In the event of an incident, near miss or any other hazardou must be reviewed and updated as appropriate.	s occurrence this RA		

Site Reviewed Model Risk Assessment 14				
For: Pilning ACF and CTC		Accepted by: Jason Cuthbert		
Interface with Emergency Services		Date reviewed: 18/02/2025		
Risk	The first responder has a duty to minimise the risk to the surrounding area upon arrival. If the gas incident is within a enclosed area, isolating the system is the correct course of action. However in a open, well ventilated area, isolating the system may not be necessary, and could cause secondary hazards			
Caused By	Poor communication  Lack of understanding			
Hazards Resulting from Risk	Risk of causing a supply emergency Causing the need to purge systems Long downtime of gas network			
Current Preventative Methods	Awareness of incidents via DNV emergency number			
Further Required Preventative Methods	Providing training to the Emergency Services, so that the tackle gas incidents	ey will be able to better		
Audits	In the event of an incident, near miss or any other hazard RA must be reviewed and updated as appropriate.	dous occurrence this		

Site Reviewed Model Risk Assessment 15				
For: Pilning ACF and CTC		Accepted by: Jason Cuthbert		
Natural Disasters, civil disturbances, other unforeseeable events		Date reviewed: 18/02/2025		
Risk	The risk of unforeseeable events causing gas related incidents cannot be planned for. However it is possible to minimise the impact of the resulting hazards			
Caused By	Explosions Ground tremors Gas pipe sabotage			
Hazards Resulting from Risk	Damage to pipelines caused by uncontrolled escaping gas Risk of causing a supply emergency Damage to persons & property Risk of Explosions & Fire Pollution of environment Purging maybe required after corrective action			
Current Preventative Methods	High security levels			
Further Required Preventative Methods	Use of the Gas Safety Management Plan			
Audits	In the event of an incident, near miss or any other hazar must be reviewed and updated as appropriate.	rdous occurrence this RA		

## **ANNEX D**

# ANNEX D - ADDITIONAL SITE-SPECIFIC RISK ASSESSMENT TEMPLATE

Please copy and add further sheets as required

Additional Site-specific Risk Assessment 16				
For:		Approved by:		
		Date reviewed:		
Risk				
Caused By				
Hazards Resulting from Risk				
Current Preventative Methods				
Further Required Preventative Methods				
Audits	In the event of an incident, near miss or any other hazardou must be reviewed and updated as appropriate.	s occurrence this RA		